



JNT-EVC10
Charging Station
Spec Sheet

JNT-EVC10: Level 2 AC EV Charger

Features



JNT-EVC10: Level 2 AC EV Charger Specifications


Power Specifications		
Input	Input Rating	200-240 VAC
	Frequency	50-60Hz
	Input Current	16-48 amps
Output	Output Current	16-48 amps
User Interface & Control		
User Authentication		RFID (ISO 14443)
Communications		
External		LAN + 4G or Wi-Fi (All Optional)
Internal		OCPP 1.6 JSON (OCPP 2.0 Compatible)
Environmental		
Operating Temperature		-30°C – +50°C / -22°F – +122°F
Humidity Maximum		95%
Altitude		≤ 2000 m / ≤ 6561 ft
IP Code		IP54
Cooling Method		Natural Cooling
Mechanical		
Product Dimensions		13.8" x 9.8" x 5.1"
Package Dimensions		19.6" x 13.7" x 10.7"
Net Weight		18.1 lbs
Gross Weight		20.3 lbs
Charging Outlet		18ft Standard (25ft Optional with Surcharge)
Protections		
CCID		CCID20
Protection Features		Overcurrent, Undervoltage, Overvoltage, Residual-Current, Surge Protection, Short-Circuit, Over Temperature, Ground Fault, Current Leakage
Regulations		
Certificate		UL 2594, UL 2231-1/-2
Safety		cETL
Wireless Certificate		Industry Canada (IC) / Federal Communications Commission (FCC)
Charging Interface		SAE J1772

JNT-EVC10: Level 2 AC EV Charger

Pedestal Options



Schematic Diagram

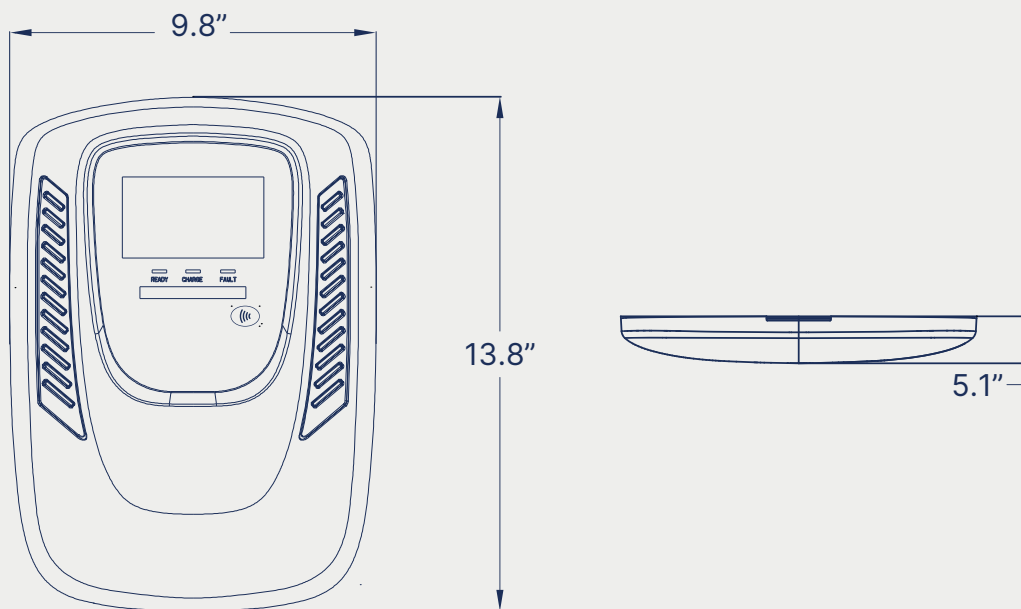

Thank you!

sales@hypercharge.com

+1 (866) 764-5433



hypercharge.com